



This project is funded by  
the European Union



Romania-Republic of Moldova  
ENI-CROSS BORDER COOPERATION



## The 1<sup>st</sup> Scientific Seminar – Academic

On the project "Improving the cross-border public transportation  
using electric buses supplied with renewable energy - ELBUS"

Project EMS-ENI code 2SOFT/3.1/54

„Gheorghe Asachi” Technical University of Iasi, Romania (TUIASI)

Research Expert 2, Ș.I.dr.ing. Gabriel Chiriac



This project is funded by  
the European Union



Romania-Republic of Moldova  
ENI-CROSS BORDER COOPERATION



## **GENERAL OBJECTIVE of the project:**

**Development of the cross-border public transportation  
using electric buses.**

**SPECIFIC OBJECTIVE 1: Development of the electric buses.**

**SPECIFIC OBJECTIVE 2: Improving of the range for the electric  
buses using renewable energy.**



This project is funded by  
the European Union



Romania-Republic of Moldova  
ENI-CROSS BORDER COOPERATION



# ANALYSIS OF THE ELECTRIC BUS OPTIMAL FUNCTIONALITY

## Activity 3.1. Analysis of the electric buses

Deliverable 3.1.1. Technical report related to the using of the electric buses

## Activity 3.2. Analysis of the auxiliary loads

Deliverable 3.2.1. Automation system for auxiliary loads

## Activity 3.3. Thermal model of the indoor climatic environment

Deliverable 3.3.1. Thermal model

Deliverable 3.3.2. Thermal map for the indoor climatic environment

## Activity 3.4. Renewable energy for the batteries

Deliverable 4.1. Hybrid charging system design for electric buses with autonomous power source



This project is funded by  
the European Union



Romania-Republic of Moldova  
ENI-CROSS BORDER COOPERATION



## Activity 3.1. **Analysis of the electric buses**

**The analyze of the optimal functionality of the electric bus had the next directions:**

**A**n overview related to the electric vehicles in general, and to electric buses, in particularly, with benefits of using of the electric power supply instead of traditional fuels and the impact on the environment.

**A** research and analysis regarding the functionality and the energetical aspects of the electric buses: the structure of the bus, the drive system, the auxiliary system and its equipment, efficiency, the traction motor.

**R**ealization of a test bench (TUIASI) including an electric motor and generator as variable load.



This project is funded by  
the European Union



Romania-Republic of Moldova  
ENI-CROSS BORDER COOPERATION



## Outputs on the Activity 3.1. **Analysis of the electric buses**

1. The benefits of using of the electric power supply instead of traditional fuels and the impact on the environment.
2. **Perspectives for fully electric buses in the EU.**
3. Technical limitations of using the electric buses.
4. **Electric buses types to use in urban and interurban transportation.**
5. Electric buses technology configurations.
6. **The drive system and the optimization of the electric buses operating.**
7. The auxiliary equipment used on the electric buses: main equipment, energy consumption and optimization.
8. **Electric motor used to drive the electric buses.**
9. **Test bench achievement:** the drive system of the electric bus accomplished in the laboratory: it permits to study the operating drive system, the energy consumption, speed, braking time, energy to be recovered.
10. Electric buses operating at variable loads. Studies and experiments on the test bench in laboratory.



This project is funded by  
the European Union



Romania-Republic of Moldova  
ENI-CROSS BORDER COOPERATION



## Activity 3.1. ANALYSIS OF THE ELECTRIC BUSES

The benefits of using of the electric power supply instead of traditional fuels and the impact on the environment.

Within the European Union the road transport is the second largest producer of carbon dioxide (CO<sub>2</sub>), one of the greenhouse gases responsible for climate problems. Fully-electric buses have potential to significantly **reduce carbon dioxide emissions**, up to 75%.

**Advantages** that electric buses offer beyond the cost consideration:

- Increasing urban quality of life:
- **lower air pollution** and **lower noise** ,
- Attractive to the people,
- **Using renewable energy**,
- **Energy security** ,
- Stimulating European industry.



This project is funded by  
the European Union



Romania-Republic of Moldova  
ENI-CROSS BORDER COOPERATION



## Limitations of using the electric buses

### Technological limitations:

- Limited range and Grid and charging infrastructure.

### Limitations due to the lack of knowledge:

- The operational characteristics, and maintenance necessary;
- Strategies and techniques to optimize the design and implementation of an electric buses project;

### Other :

- Difficulties for agencies in changing procurement practices: typically use rigid financial management models, low-risk procurement.
- Traditional procurement practices also do not allocate responsibilities for the new tasks associated with electric buses operations, such as maintaining the batteries and grid infrastructure.



This project is funded by the European Union



Romania-Republic of Moldova  
ENI-CROSS BORDER COOPERATION



# Electric buses types to use in urban and interurban transportation

DEPOT CHARGING



**Overnight charging – ONC.**

**Opportunity charging - OC.**

**Combining depot charging and opportunity charging.**

OPPORTUNITY CHARGING



COMBINATION







This project is funded by the European Union




Romania-Republic of Moldova  
ENI-CROSS BORDER COOPERATION



# Electric buses technology configurations

- Hybrid electric buses (HEBs)
- Battery electric buses (BEBs)
- Fuel cell electric buses (FCEBs)

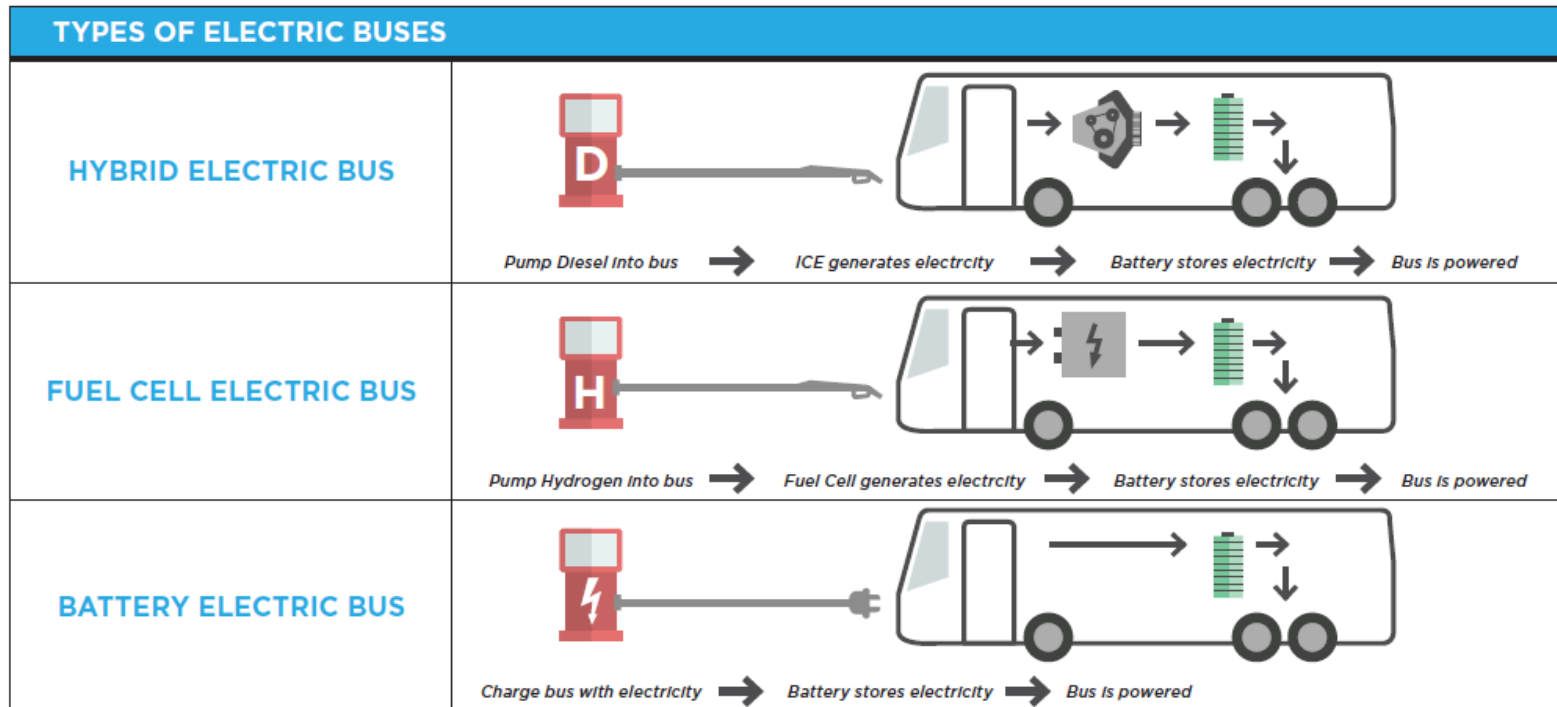




This project is funded by  
the European Union



Romania-Republic of Moldova  
ENI-CROSS BORDER COOPERATION

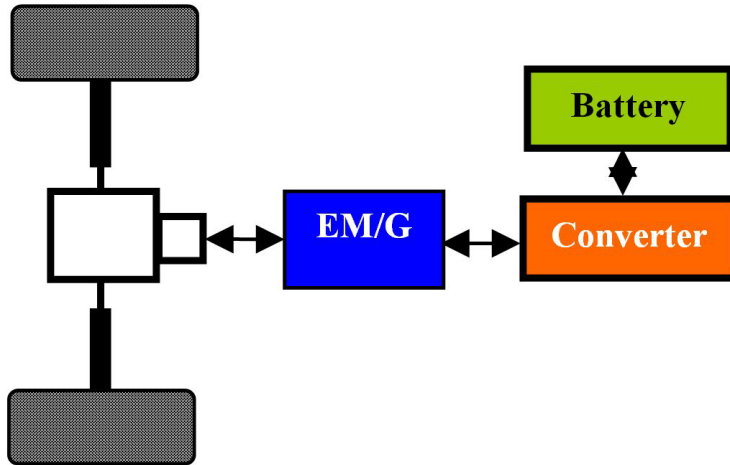

## Battery electric drive system for electric buses

### The main electric bus components:

- The drive motors,
- an Auxiliary Power Unit (APU),
- controllers and inverters,
- the energy storage device and
- other auxiliary systems, such as air conditioning and lighting.



This project is funded by  
the European Union



Romania-Republic of Moldova  
ENI-CROSS BORDER COOPERATION



# The drive system and the optimization of the electric buses operating

## Battery Electric Buses (BEB)

Increasing the battery capacity results in an increased range, however this also increases the vehicle cost, increases weight, and decreases passenger capacity.

Overloading of the local electricity grid is another infrastructure challenge that arises through electric buses implementation, especially if large numbers of opportunity BEBs are used in one area.



This project is funded by  
the European Union



**Romania-Republic of Moldova**  
ENI-CROSS BORDER COOPERATION



## **Electric motors used to drive the electric buses**

They have frequent starts and stops, they need high acceleration rate for fast starting and capability to work in harsh environments.

Motor drives require high efficiency over a wide speed and torque region, high torque and power densities, fast dynamic response, simple construction, high reliability, regenerative braking capability, good controllability and low noise

- **DC motors**
- **Squirrel cage induction motors (IM motors)**
- **Permanent magnet brushless motors (PM)**
- **Switched reluctance machines (SRM)**



This project is funded by  
the European Union



Romania-Republic of Moldova  
ENI-CROSS BORDER COOPERATION



## The auxiliary equipment used on the electric buses: main equipment, energy consumption and optimization

**HVAC: Heating,**  
**Ventilation,** and  
**Air Conditioning.**

### Other auxiliaries:

- Battery cooling,
- Air compressor,
- Steering,
- Doors drive,
- Lights.



This project is funded by  
the European Union




Romania-Republic of Moldova  
ENI-CROSS BORDER COOPERATION



## ELECTRIC BUS TEST BENCH

An important aspect is to analyze the electric traction system for the electric bus at variable loads. The principles are studied in the laboratory on a test-bench including an electric motor and generator as variable load.

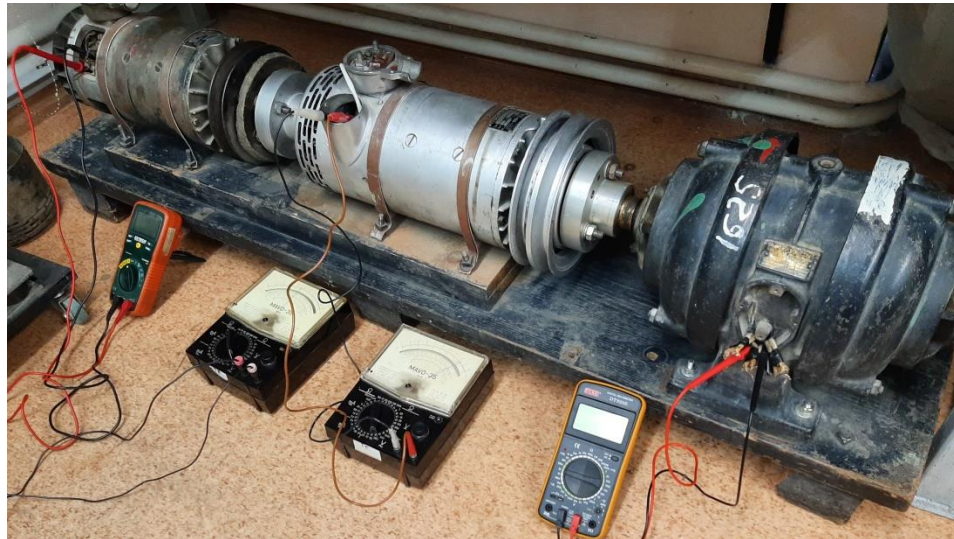





This project is funded by the European Union



Romania-Republic of Moldova  
ENI-CROSS BORDER COOPERATION




## Torque speed characteristics of the three-phased AC motor

The torque speed characteristics are considered for the next supply voltages:

0.6  $U_n$ ;

0.8  $U_n$ ;

$U_n = 400$  V.

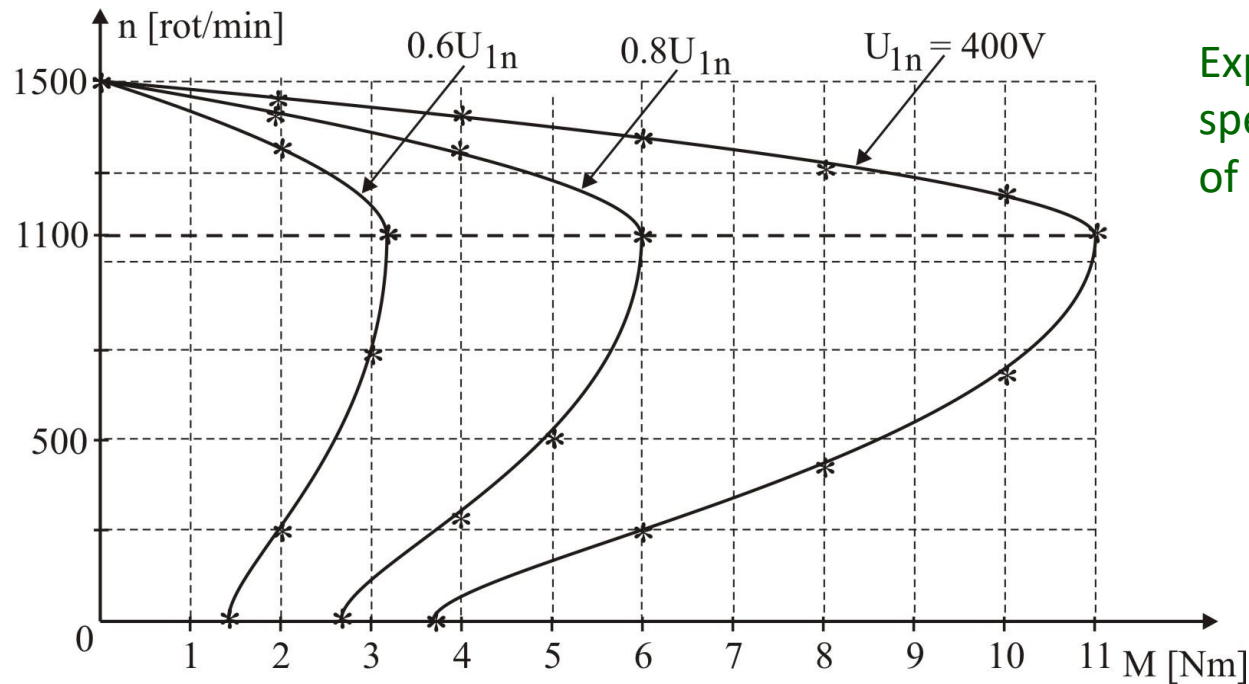

Experimental torque speed characteristics of the AC motor.






This project is funded by the European Union




Romania-Republic of Moldova  
ENI-CROSS BORDER COOPERATION



## Efficiency of the three-phased asynchronous motor

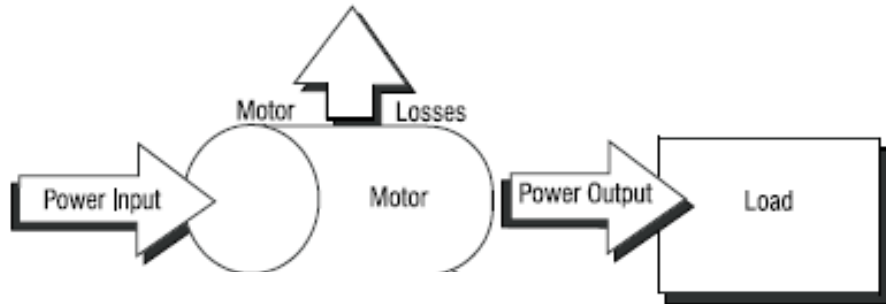

Power configuration for an electric motor.

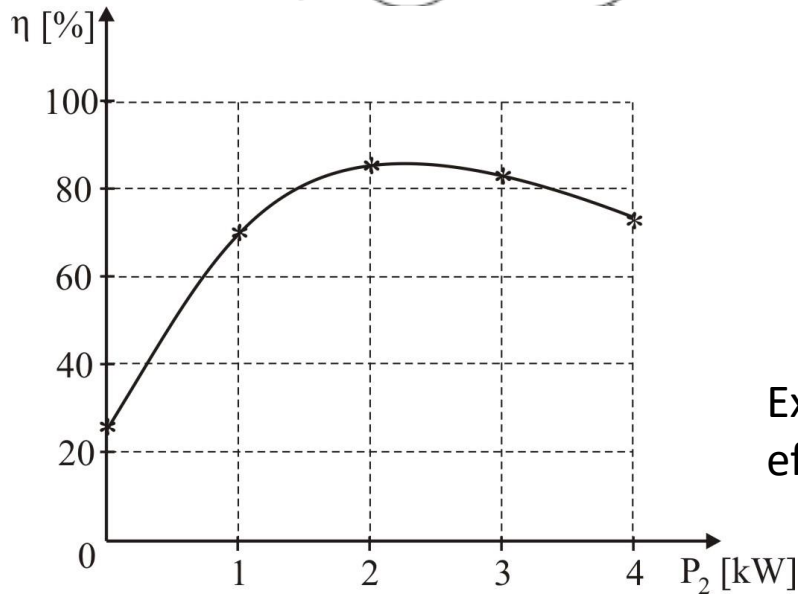

Experimental characteristic for the efficiency of the AC motor.



This project is funded by  
the European Union



Romania-Republic of Moldova  
ENI-CROSS BORDER COOPERATION



## Activity 3.2. ANALYSIS OF THE AUXILIARY LOADS

A research and analysis regarding the auxiliary loads on the electric bus in order to estimate and to improve their energy efficiency.

Study a heating/cooling system to be used on an electric bus from thermal efficiency point of view.

It will be developed an automation system based on PLC (Programmable Logic Controllers) for an optimal control of the heating/cooling devices.



This project is funded by  
the European Union




Romania-Republic of Moldova  
ENI-CROSS BORDER COOPERATION



## GENERAL ASPECTS ON AUXILIARY LOADS

- The fixed energy consumption auxiliaries, which are used both when the electric bus is standing and when it is running;
- The variable energy consumption auxiliaries, which depend on the fluctuant characteristics (e.g. number of the bus stations, number of traffic lights on the route, number of the curves, weather as sunny/cloudy, day/night, other traffic conditions).

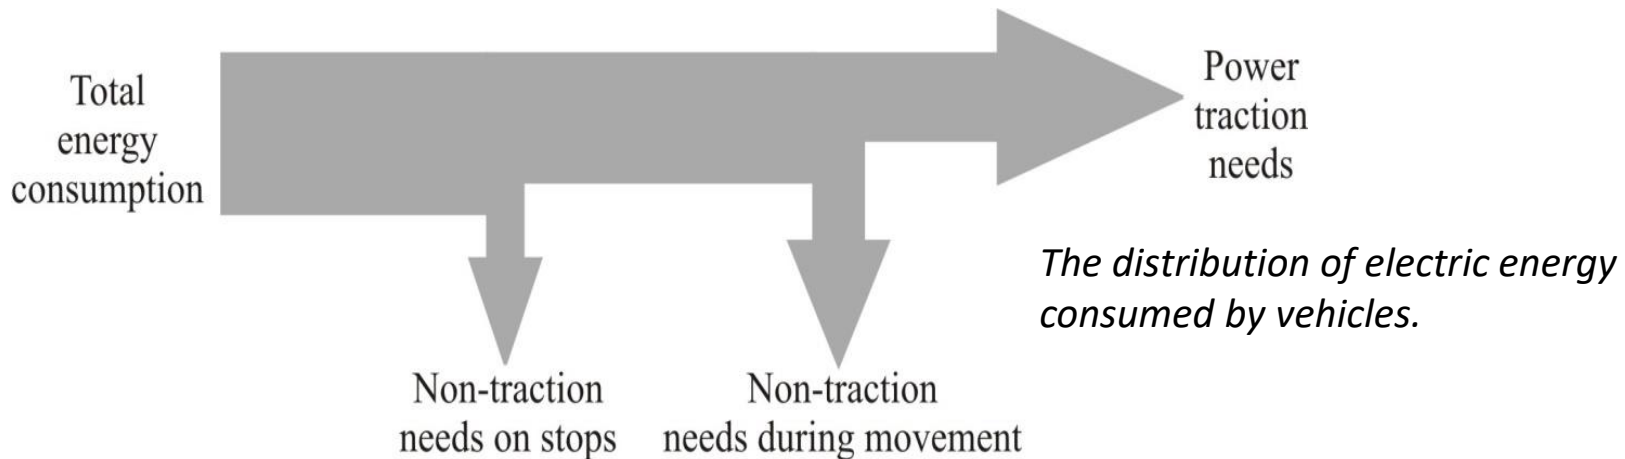



This project is funded by  
the European Union



Romania-Republic of Moldova  
ENI-CROSS BORDER COOPERATION



- The auxiliary systems can be considered also of two categories:
- Auxiliary systems **for safety** (lights, horn, window cleaner, doors opening etc.) and,
  - Auxiliary systems **for comfort** (climate control, media etc.).




This project is funded by the European Union



Romania-Republic of Moldova  
ENI-CROSS BORDER COOPERATION



## The values of average energy consumption and daily average outside temperature in annual scale

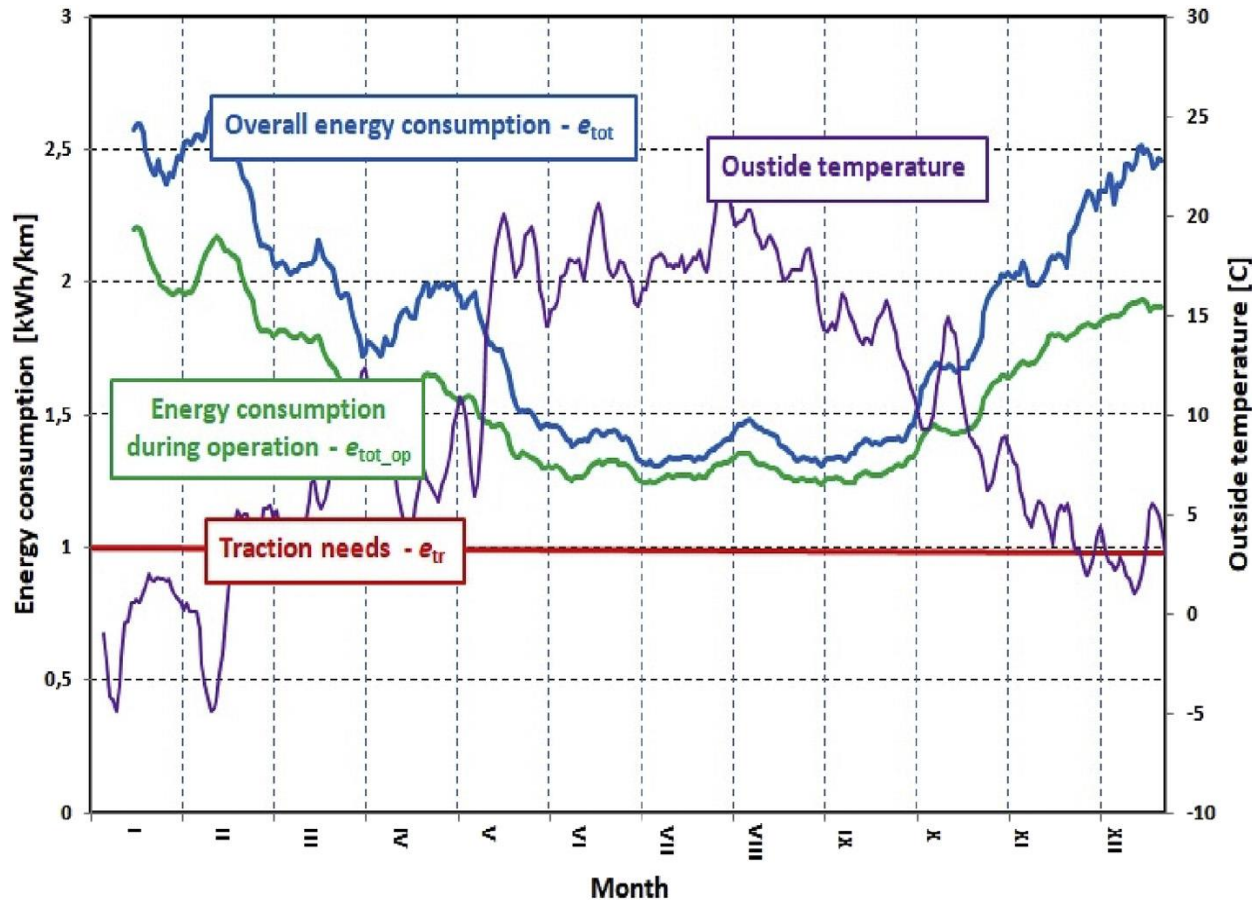



This project is funded by  
the European Union



Romania-Republic of Moldova  
ENI-CROSS BORDER COOPERATION



## COMFORT OF THE PASSENGERS AND THE AUXILIARY ENERGY DEMAND

What a person perceives as a comfortable temperature depends on many parameters:

1. **Air humidity:** humidity causes the temperature that is perceived by a person to be amplified.
2. **Air velocity:** if there is an air flow around the person, the heat energy transfer between the person and the ambient air increases.
3. **Radiation:** besides the cabin air being heated up by the sun, a person could also feel the direct effect of the radiating sun.
4. **Seasonal effects:** comfort is also closely related to temperature differences. If the outside temperature in the winter is  $0^{\circ}\text{C}$ , an inside temperature of  $15^{\circ}\text{C}$  might already feel warm. Instead, in the summer, this setpoint might be too low.
5. **Metabolism:** differences between persons in metabolism cause differences in the perceived comfort in temperature (body weight, gender and age).



This project is funded by  
the European Union



Romania-Republic of Moldova  
ENI-CROSS BORDER COOPERATION



## ***ECO-Comfort***

Optimization of the thermal system of electric vehicles is defined as the ECO-comfort functionality. This functionality can be summarized in two topics:

**1. Dynamic temperature setpoint:** A temperature setpoint can vary over the day to account for ambient temperature changes. Similarly, the same method can be applied between summer and winter conditions.

**2. Pre-conditioning:** Pre-conditioning means that the cabin climate is already controlled towards the desired temperature while the vehicle is still connected to the charger either in the depot or in route at terminal stops. This way, the initial required energy peak to control the temperature is taken directly from the grid rather than from the battery. This improves also the driving range of the vehicle.



This project is funded by  
the European Union



Romania-Republic of Moldova  
ENI-CROSS BORDER COOPERATION



## ENERGY MODEL FOR AN ELECTRIC BUS

The traction energy consumption is dependent on the sum of resistance forces  $F_{res}$ , shown in Equation (1).

$$F_{res} = \lambda m m \dot{v} + mg f R \cos(\alpha) + \frac{1}{2} \rho L c W A v^2 + mg \sin(\alpha). \quad (1)$$

The total required battery power  $P_{total}$ :

$$P_{total} = \frac{F_{res} v}{\eta_{drive}} + P_{aux} \quad (2)$$

Auxiliary power demand is mainly dependent on the electric power of the HVAC system  $P_{HVAC}$  and to other components  $P_{others}$ :

$$P_{aux} = P_{HVAC} + P_{others}. \quad (3)$$






This project is funded by the European Union



Romania-Republic of Moldova  
ENI-CROSS BORDER COOPERATION

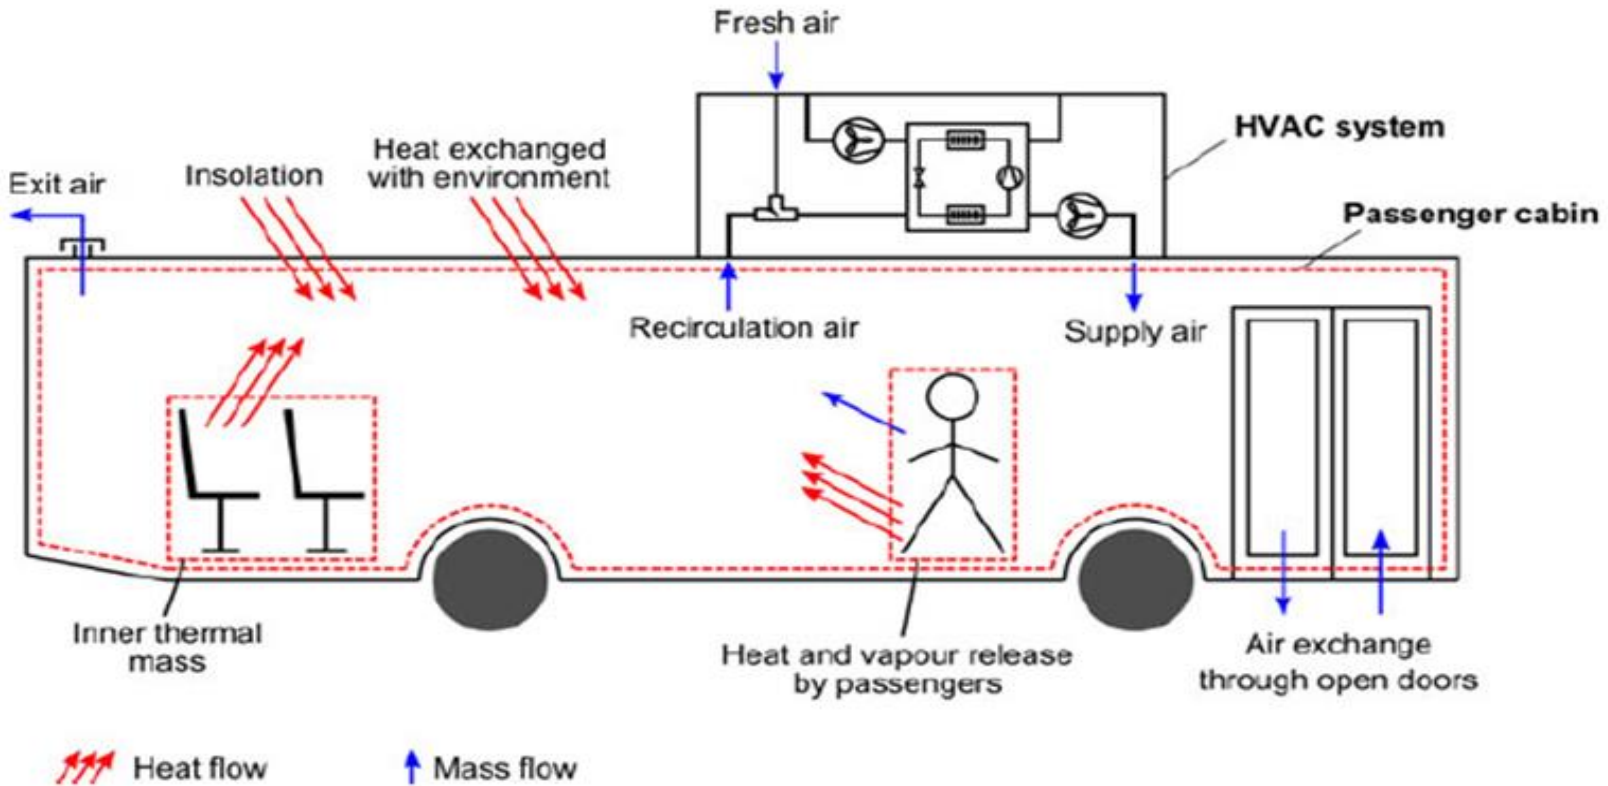

Thermal model and the environment  
heat exchange for an electric bus.




This project is funded by the European Union



Romania-Republic of Moldova  
ENI-CROSS BORDER COOPERATION



# HEATING, VENTILATION AND AIR-CONDITIONING (HVAC) SYSTEMS

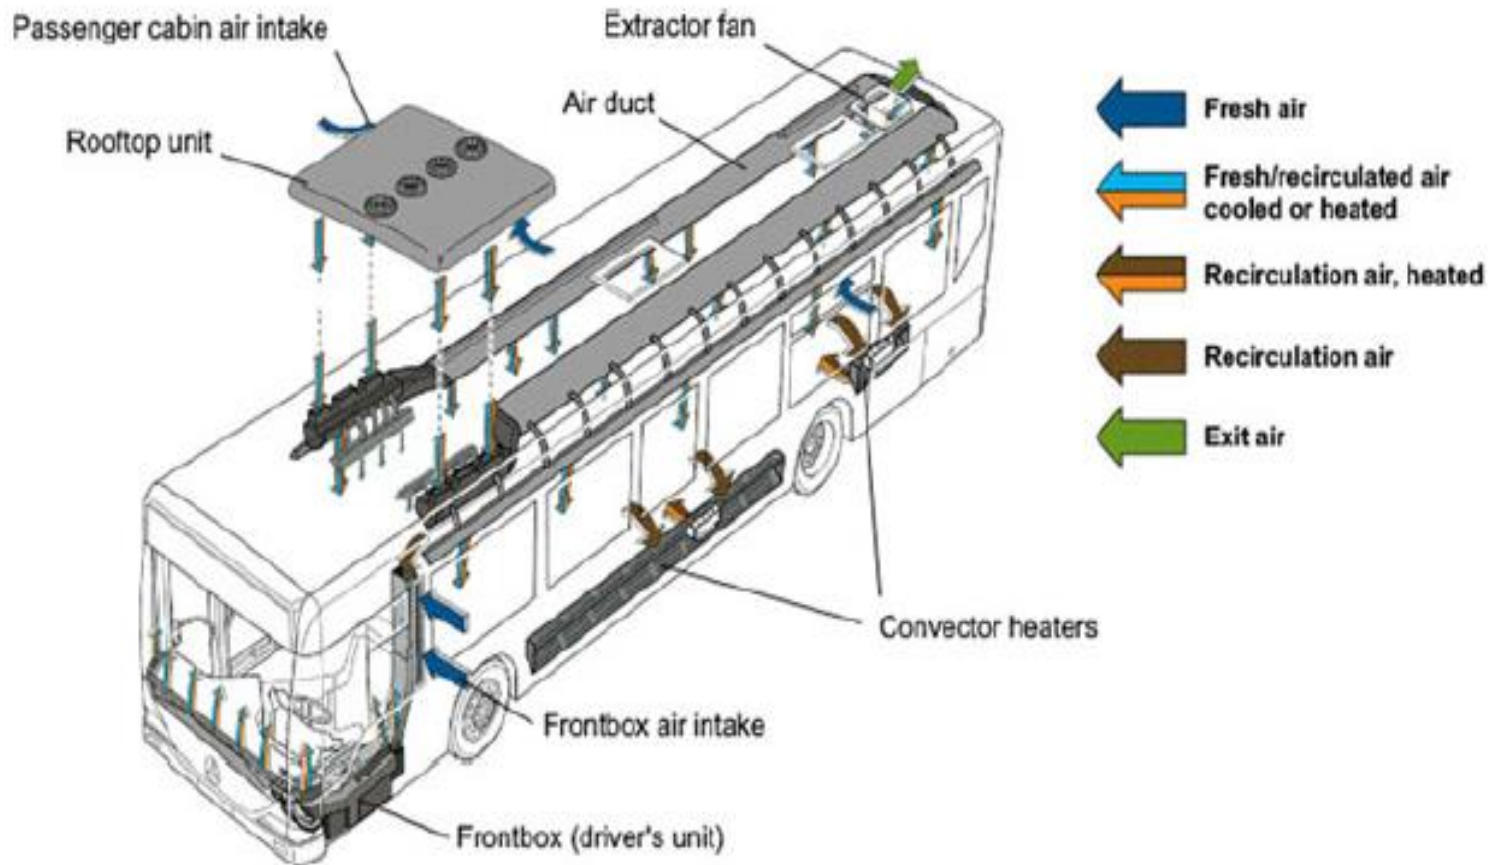



This project is funded by  
the European Union



Romania-Republic of Moldova  
ENI-CROSS BORDER COOPERATION



## **OTHER AUXILIARY LOADS**

**Lighting (indoor, outdoor)**

**Windows cleaning system and seat heating.**

**Audio system.**

**Opening and closing of door, windows and roof.**

**Anti-lock Braking System – ABS.**



This project is funded by  
the European Union



Romania-Republic of Moldova  
ENI-CROSS BORDER COOPERATION



## OVERALL ENERGY CONSUMPTION OF AUXILIARY SYSTEMS

Auxiliary systems	Part of traction battery energy, %
Climate control:	
– cooling:	Up to 30%
– heating:	Up to 35%
Power steering	Up to 5%
Braking system	Up to 5%
Other (lights, media, locks etc.)	Up to 5%

The information presented in Table is more general and does not include all operational conditions of electric vehicles.

The **lighting, passenger information systems, and air compressor are responsible for 20-25%** of total energy consumption.

Under standard operating conditions, **the non-traction energy consumption is up to 1.2 kWh/km.**



This project is funded by  
the European Union



Romania-Republic of Moldova  
ENI-CROSS BORDER COOPERATION



- Organization blocks (OBs) define the structure of the program. Some OBs have predefined behavior and start events, but the user can also create OBs with custom start events.
- Functions (FCs) and function blocks (FBs) contain the program code that corresponds to specific tasks or combinations of parameters. Each FC or FB provides a set of input and output parameters for sharing data with the calling block.
- Data blocks (DBs) store data that can be used by the program blocks.

### **Operating modes of the CPU:**

The CPU has three modes of operation:

STOP mode,

STARTUP mode, and

RUN mode.



This project is funded by  
the European Union



Romania-Republic of Moldova  
ENI-CROSS BORDER COOPERATION



## **Output 3.1. Increasing the energy efficiency of the auxiliary loads**

First of all they were identified the auxiliary loads specific for an electric bus, that is: heating, cooling, various electric systems (lighting, doors, windows, windshield wiper, ventilation for the traction motors, battery cooling, air compressor, steering pump). Activity 3.2 in the project (Analysis of the auxiliary loads) extended the researches and results into the increasing of the energy efficiency of the auxiliary loads.

## **Output 3.2. Increasing the overall energy efficiency of the electric bus**

The increasing of the overall energy efficiency of the electric bus was considered from various perspectives, such as: efficiency of the drive motors, efficiency of the battery charging, and to supply the auxiliary loads.

An automated model controlled with PLC have been started to be developed in order to implement and to control energy strategies on the auxiliary loads, having as final result an overall reduction of consumption by saving electricity to auxiliary consumers.



This project is funded by  
the European Union



Romania-Republic of Moldova  
ENI-CROSS BORDER COOPERATION



## **Programme output 1. Number of environmentally friendly (carbon-proofed) cross-border transport initiatives developed**

In order to achieve the program output, into the TUIASI laboratories it was realized a test bench for studying the electric energy consumption, and the possibilities to increase the energy efficiency of the electric bus.

It was studied power consumption, current consumption, useful power, efficiency of the drive line and other various electric parameters which are important in improving the energy efficiency. Another aspect was to study the possibilities to improve the operating of the auxiliary loads by integrated them within the main power supply system (heating, cooling, doors operating, ventilation).



This project is funded by  
the European Union



Romania-Republic of Moldova  
ENI-CROSS BORDER COOPERATION



## ACTIVITY 3.3.

# THERMAL MODEL OF THE INDOOR ENVIRONMENT

**Research and analysis regarding the thermal aspects of the interior of the electric bus:**

1. Realization of a model of the inside geometry of the electric bus – UTM responsibility.
2. Develop a thermal model for the indoor bus environment using a dedicated CFD software package based on finite element method – TUIASI responsibility.
3. Realization of simulations based on the thermal model.
4. A comparative analysis between the temperature measurements inside the bus provided.





This project is funded by  
the European Union



Romania-Republic of Moldova  
ENI-CROSS BORDER COOPERATION



## THERMAL MODEL INSIDE THE BUS ENVIRONMENT

Heat transfer theory, heat balance method and U-Value definition can be named as the foundations used in calculations and modelling. Based on the heat transfer theory there are three mechanisms for transferring heat: conduction, convection and radiation.

**The total heat released to the cabin is given by:**

- Ambient** load, as the thermal load caused by the temperature gradient between inside air and ambient temperature,
- Radiation** loads,
- Metabolic** load, generated by human body,
- Ventilation** load, as the flow of fresh air,
- Engine/Motor** load, due to the motors of the bus,
- AC** load, for keeping the internal temperature in the comfort zone by heating or cooling.



This project is funded by  
the European Union



Romania-Republic of Moldova  
ENI-CROSS BORDER COOPERATION



# Heat Transfer Model

## ***Heat conduction***

*Conduction follows Fourier's law for one-dimensional heat conduction.*

$$q = -kA \frac{dT}{dx}$$

Where:

q is the heat-transfer rate, W;

A is cross-sectional area, m<sup>2</sup>;

k is the thermal conductivity of the material, W/(m.K);

dT/dx is the temperature gradient.



This project is funded by  
the European Union



Romania-Republic of Moldova  
ENI-CROSS BORDER COOPERATION



## ***Heat convection***

*The basic formula of calculating convective heat transfer rate is the Newton's law of cooling*

$$q = hA\Delta T$$

Where:

q is heat-transfer rate;

h is convection heat transfer coefficient, W/(m<sup>2</sup>.k);

A is area, m<sup>2</sup>;

ΔT is temperature difference between fluid and surface, K.



This project is funded by  
the European Union



Romania-Republic of Moldova  
ENI-CROSS BORDER COOPERATION



## ***Heat radiation***

*Based on the Stefan-Boltzmann law:*

$$e_b(T) = \sigma T^4$$

Where:

$E_b$  is the energy radiated per unit time and per unit area.

$\Sigma$  is the Stefan-Boltzmann constant with value of  $5.7 \times 10^{-8} \text{ W/m}^2\text{K}^4$

$T$  is temperature, K.




This project is funded by the European Union



Romania-Republic of Moldova  
ENI-CROSS BORDER COOPERATION



## Heat Balance Method for the electric bus

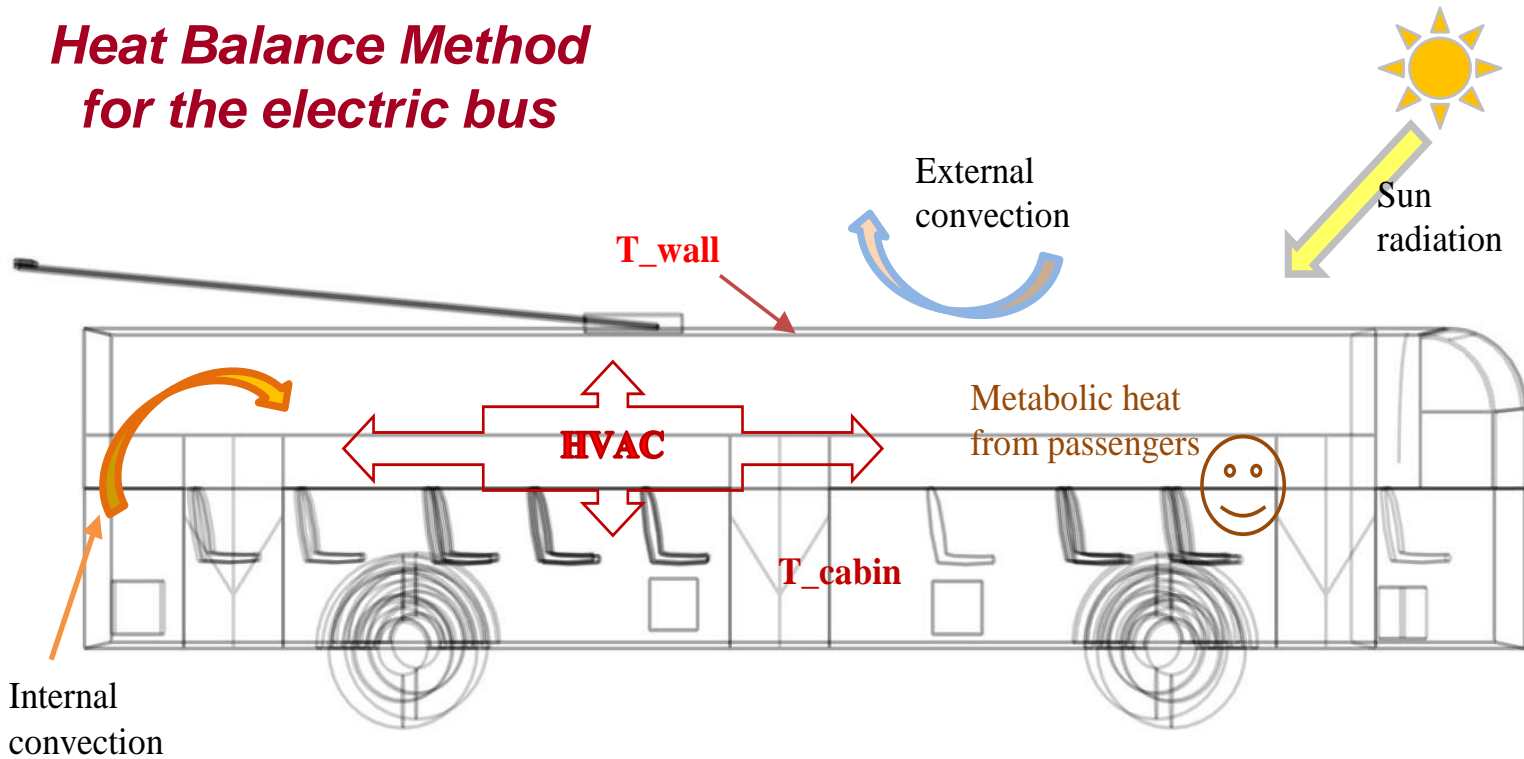

Thermal processes into an electric buses.



This project is funded by  
the European Union



Romania-Republic of Moldova  
ENI-CROSS BORDER COOPERATION



# DESIGNING OF THE INSIDE GEOMETRY MODEL OF THE ELECTRIC BUS

## *Geometry model of the real electric bus*

The geometry of the electric bus is constructed as a basic geometry and is composed from:

- Passenger' cabin;
- Driver' cabin;
- Front, rear, and lateral walls of the bus;
- Windshield (front/driver window);
- Rear and lateral windows;
- Floor;
- Roof;
- Doors;
- Wheels;
- Passengers' seats;
- Driver's seat;
- Power collecting current system (on the roof);
- Electric air heat units (4 pieces) inside the passengers cabin;
- Heating block (inside the driver cabin).



This project is funded by the European Union




Romania-Republic of Moldova  
ENI-CROSS BORDER COOPERATION



UNIVERSITATEA TEHNICĂ  
A MOLDOVEI

## The main dimensions of the ebus

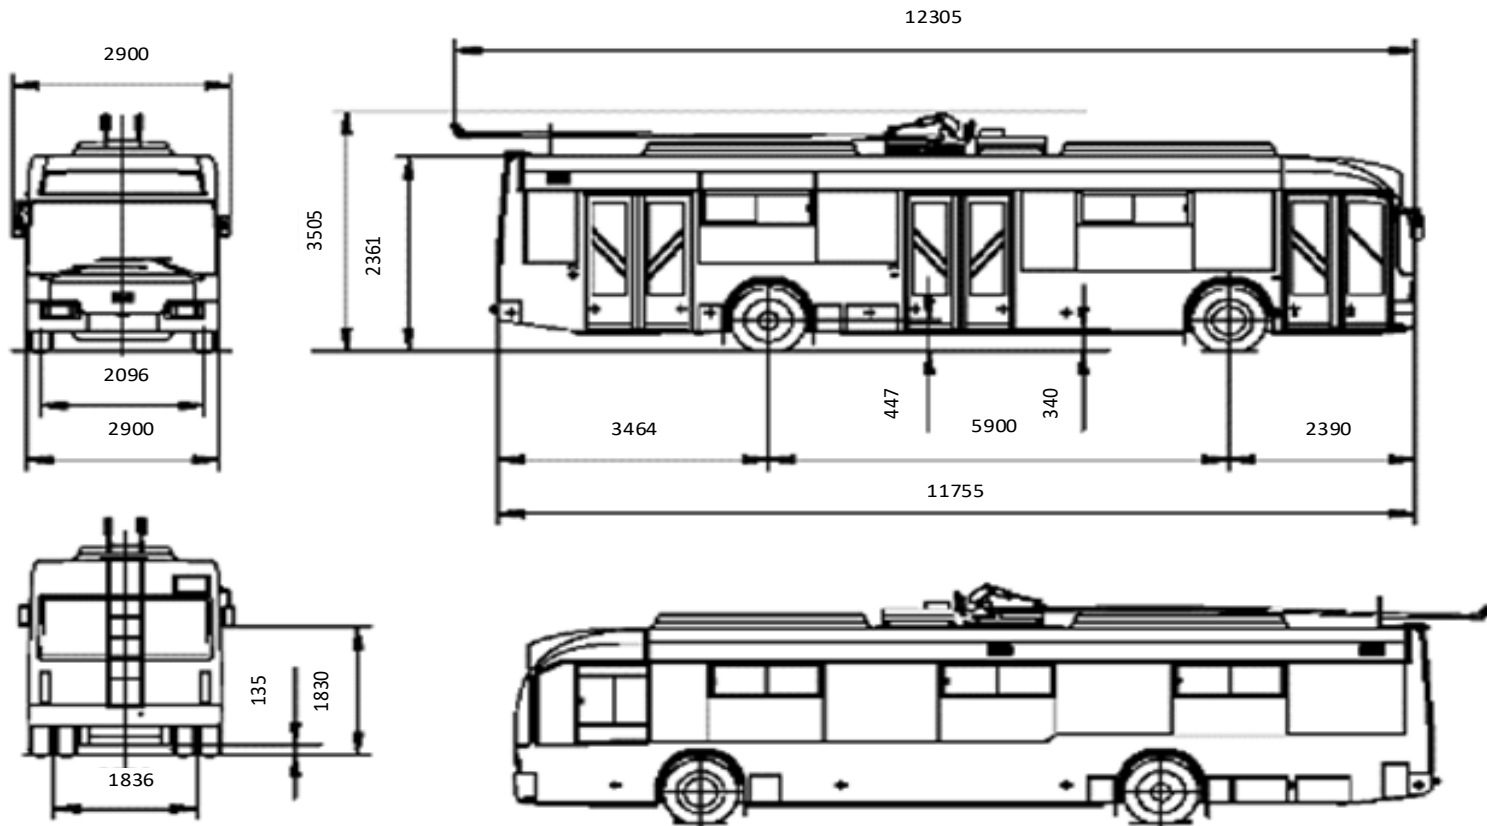




This project is funded by  
the European Union



Romania-Republic of Moldova  
ENI-CROSS BORDER COOPERATION



## CAD model

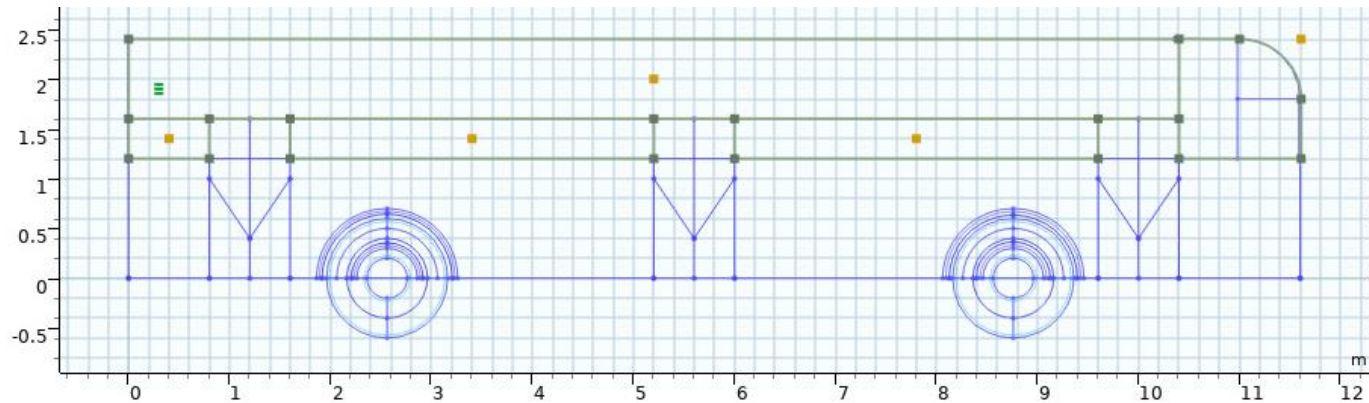

### 2D design of the bus.

The dimensions of the electric bus are designing into the geometry model according to the real dimensions of the real vehicle, an electric bus E321 used currently on public transportation in Kishinev, Republic of Moldova.






This project is funded by  
the European Union



Romania-Republic of Moldova  
ENI-CROSS BORDER COOPERATION

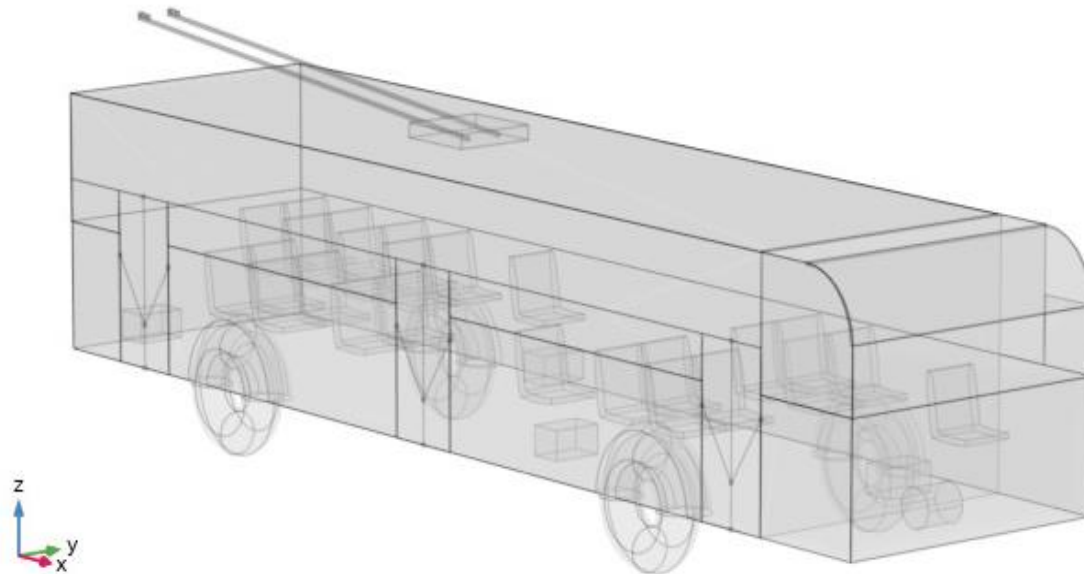

The basic geometry model of the electric bus; transparency view.

The materials considered for the components of the bus for the model are:

- iron,
- glass,
- acrylic plastic,
- glass fiber and
- PMMA - polymethyl methacrylate.

The inside volume of the bus is modelled as fill with air.




This project is funded by the European Union



Romania-Republic of Moldova  
ENI-CROSS BORDER COOPERATION



## SIMULATIONS AND RESULTS

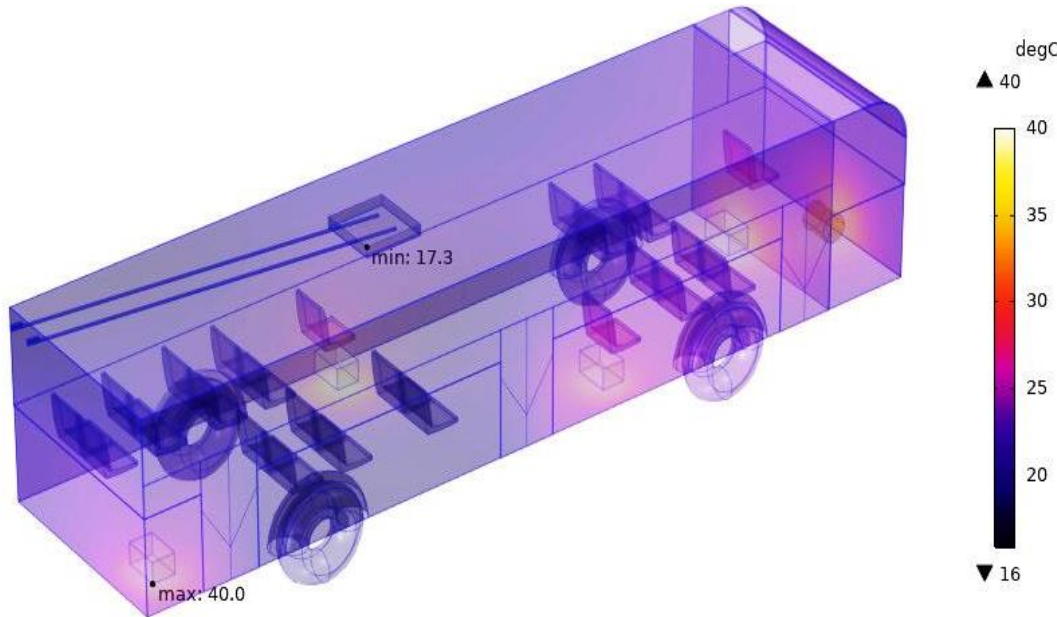

Simulation results on the temperature distribution on the bus

The temperatures are estimated at the surfaces of the component of the bus.

It is to observe that the maximum temperature, as expected, is on the heaters (40 °C), and the minimum temperature is on the exterior surface of the roof, next to the power collecting box system where are attached the trolleys (17.3 °C).



This project is funded by the European Union



Romania-Republic of Moldova  
ENI-CROSS BORDER COOPERATION



# Thermal Measurement in electric bus





This project is funded by  
the European Union



Romania-Republic of Moldova  
ENI-CROSS BORDER COOPERATION



## A comparative analysis between the temperature measurements inside the bus and the simulations results



Temperature measured  
with thermal image camera  
on the driver area on the bus

For the validation of the thermal model it were realised some experimental measures inside the electric bus. The results of the simulations were compared with the measured temperatures.

The temperatures were measured in different areas inside the electric bus with a point-and-shoot infrared camera (thermal imaging camera FLIR).

The temperature measured on the driver area is 27.8 °C, a quite comfortable for the driver.

The simulated maximum temperatures inside the drivers' cabin are between 25.2 °C and 27.9 °C, which are quite close to the measured temperature, of 27.8 °C.



This project is funded by  
the European Union



Romania-Republic of Moldova  
ENI-CROSS BORDER COOPERATION



## CONCLUSIONS

1. The geometry of an electric bus indoor is designed considering the main components of the vehicle: passengers' cabin, driver's cabin, windows, walls, seats and the main materials according to the real bus.
2. To study the heat transfer into the electric bus, a computer aided design is used based on the heat transfer theory.
3. Thermal model and simulations are made for the heat transfer inside the electric bus.
4. The simulated data are compared with measurement data, and based on these data, it is to conclude that the thermal model of the electric bus can be validated and it can be used further for various thermal simulations.



This project is funded by  
the European Union



Romania-Republic of Moldova  
ENI-CROSS BORDER COOPERATION



## ACTIVITY 3.4

# RENEWABLE ENERGY FOR THE BATTERIES

- **Photovoltaic panels**
- **Batteries parameters for the electric buses**
- **Hybrid charging system design for electric buses with  
autonomous power source**




This project is funded by the European Union



Romania-Republic of Moldova  
ENI-CROSS BORDER COOPERATION




# PHOTOVOLTAIC PANELS

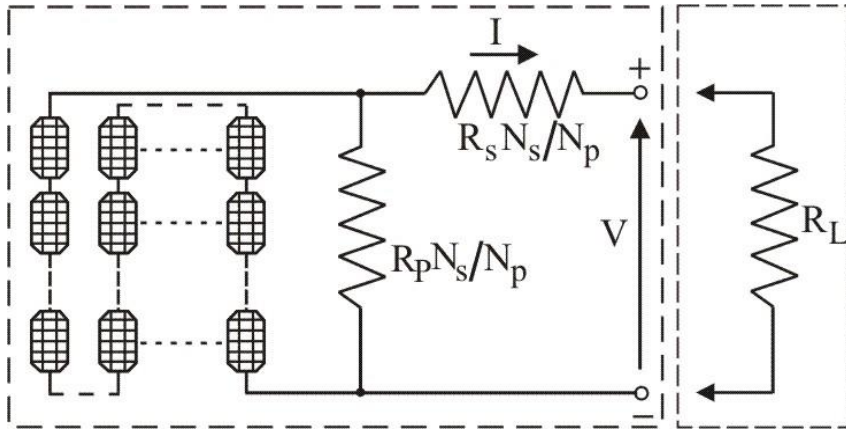

The PV module equivalent circuit model.

Photovoltaic (PV) systems are largely used in producing electric energy for different applications, starting from low power systems (Kilowatts) to very large power systems (tenth of Megawatts).

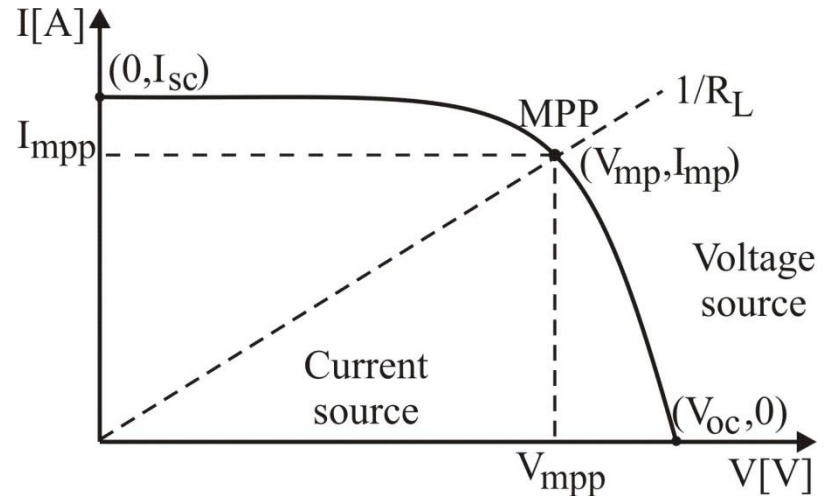


Characteristics of a photovoltaic device.




This project is funded by the European Union



Romania-Republic of Moldova  
ENI-CROSS BORDER COOPERATION

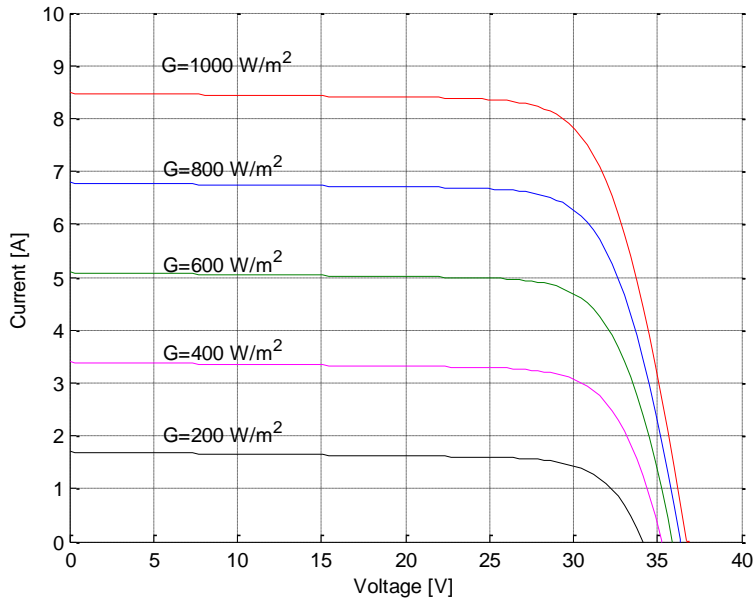

I-V curves for different solar irradiances

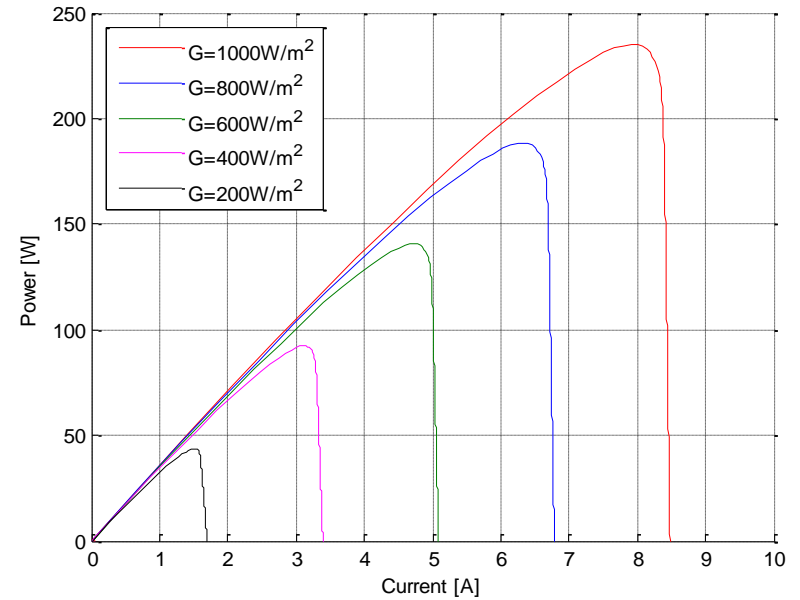

P-I curves for different solar irradiances





This project is funded by  
the European Union



Romania-Republic of Moldova  
ENI-CROSS BORDER COOPERATION



## **BATTERIES PARAMETERS FOR THE ELECTRIC BUSES**

- ✓ The main parameters of the batteries are :
- ✓ Cell (battery) voltage;
- ✓ Capacity;
- ✓ State of Charge (SOC);
- ✓ Specific energy, specific density and specific power;
- ✓ Cycle life;
- ✓ Operating temperatures;
- ✓ Self-discharge rate;
- ✓ Recharge time;
- ✓ Battery efficiency;
- ✓ Charge efficiency;
- ✓ Memory effect;
- ✓ Depth of Discharge (DoD);
- ✓ Battery geometry;
- ✓ Safety and environmental concerns;
- ✓ Cost.




This project is funded by the European Union



Romania-Republic of Moldova  
ENI-CROSS BORDER COOPERATION



# HYBRID CHARGING SYSTEM DESIGN FOR ELECTRIC BUSES WITH AUTHONOMUS POWER SOURCE

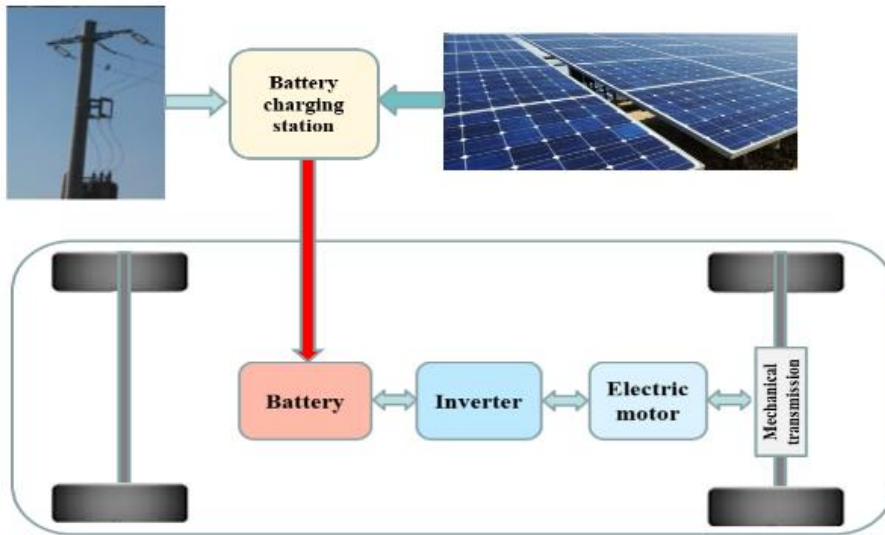

The EV charging station structure with hybrid power supply




Charging station of the trolleybuses



This project is funded by the European Union



Romania-Republic of Moldova  
ENI-CROSS BORDER COOPERATION

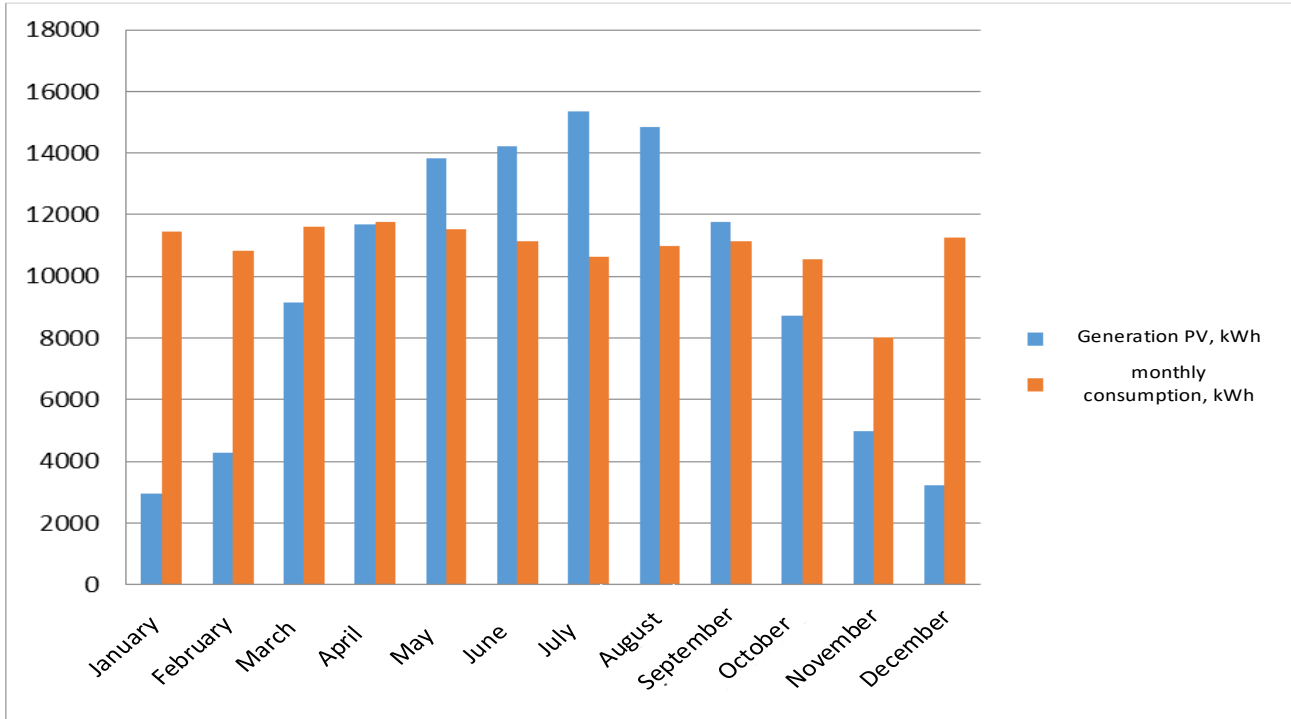

The energy production and consumption on each month of the photovoltaic plant integrated with charging station



This project is funded by  
the European Union



Romania-Republic of Moldova  
ENI-CROSS BORDER COOPERATION



## CONCLUSIONS

1. Following the analysis of the current state of the station in the Sângera town, an average of energy consumption about 320 [kWh/day] was estimated and this consumption depends on the route taken by the electric bus, and the season.
2. According to the analysis of the annual electricity consumption of the charging station currently located in the town. Bleeding, this being 130900 [kWh/year]. Based on these data, a park with an installed capacity of 90[kW] was calculated. The designed park provides both the charging station with electricity, and the surplus is injected into the network.
3. For energy injection into the network and for the charging station operation in autonomous mode, 3 Hybrid inverters of 30 [kW] were selected. The division of the entire park into 3 fields was dictated by the nominal power of these inverters.



This project is funded by  
the European Union



Romania-Republic of Moldova  
ENI-CROSS BORDER COOPERATION



## Scientific Results Articles:

### GEOMETRY DESIGN AND ANALYSIS OF AN ELECTRIC BUS FOR THE INTERIOR THERMAL MODELLING

C Nițucă, [G Chiriac](#), G Gabor, I Nucă... - *Journal of Energy ...*, 2021 - [search.proquest.com](#)

Sistem ogrevanja, prezračevanja in klimatizacije (HVAC) predstavlja glavno dodatno obremenitev za vse vrste avtobusov. Ker gre za sistem z največjo porabo energije pri električnem ...

☆ [Salvați](#) [Citați](#) Citat de 2 ori

### Aspects regarding the heating of electric buses

[G Chiriac](#), DD Lucache, C Nițucă... - ... and *Energy Systems ...*, 2021 - [ieeexplore.ieee.org](#)

Heating the electric vehicles requires new challenges compared to thermal engine vehicles. Limited energy available from the traction battery needs new approaches for the heating ...

☆ [Salvați](#) [Citați](#) Citat de 1 ori

### A Hybrid Charging System Design for Electric Vehicles with Autonomous Power Source

..., A Moldovan, C Nițucă, [G Chiriac](#)... - ... and *Energy Systems ...*, 2021 - [ieeexplore.ieee.org](#)

The paper focuses on the development of hybrid battery charging systems for autonomous electric passenger vehicles. Aspects of elaboration and design methodology of the battery ...

☆ [Salvați](#) [Citați](#) Toate cele 3 versiuni

Guide on Electric Buses



This project is funded by  
the European Union



**Romania-Republic of Moldova**  
ENI-CROSS BORDER COOPERATION



# **THANK YOU FOR YOUR ATTENTION!**

**[gchiriac@tuiasi.ro](mailto:gchiriac@tuiasi.ro)**